



CASCADe  
LUXURY VINYL

**IMPACT**  
LUXURY VINYL TILE



IMP01 Fifth Ave Spice



IMP02 Electric Grey




IMP03 Ocean Sand




IMP04 Park Ave Slate



IMP06 Oxford Hickory



IMP09 Rodeo Mist




IMP10 Sunset Khaki



IMP66 Cathedral Brown



IMP12 Wall St Steel




IMP14 Hyde Park Brown



IMP17 Camben St Tan



IMP27 Arctic Express



IMP20 Canal St Fawn




IMP22 Victoria Grey



IMP26 Bedrock



IMP28 Frosted Grey




IMP50 Duke St Wash



IMP52 Granville Mocha



IMP55 Iron Wood



IMP56 Roasted Truffle



IMP65 Horse Shoe Beige




IMP67 Wolf Grey



IMP68 Sonic Grey



IMP70 Century Natural




IMP69 Lighthouse Oak



IMPT72 Harbour Stone



IMPT73 Carbon Concrete

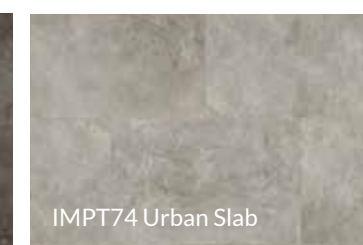

IMPT74 Urban Slab



IMPT71 Ashford Marble



## IMPACT SPECIFICATIONS

Constructions	PVC
Thickness	2mm
Wear Layer	0.3mm   12 mil
Size	7" x 48" / 12.36" x 24.6"
Finish	Polyurethane w/ anti bacterial nano silver, satin gloss
Edge Detail	Square edge
Sf Per Carton	12.36" x 24.6" = 52.81" 7" x 48" = 51.33
Sf Per Pallet	12.36" x 24.6" = 24.6" = 2,746.12 7" x 48" = 2566.5
Installation	Glue Down
Classification	Good
Residential Warranty	25 Year Limited Residential
Commercial Warranty	10 Year Limited Medium Commercial
Suggested Adhesive	Armstrong S 288, Armstrong S 310 Wolf Grip Premium, DriTac Megabond 5900
Emissions	FloorScore Certified

## PERFORMANCE TESTING

Fire Rating	ASTM E84   75 or less
Mekel Burner Test	Pass
Heat Stability	KSM 3802   0.3mm/ 0.01"80C+2C, 6hr/1hr
Abrasion Resistance	ASTM D3884   0.1% Loss
Slip Resistance Ada	Exceeds ADA Requirements
Dry Static Coefficient Of Friction	ASTM C1028   0.72
Wet Static Coefficient Of Friction	ASTM C1028   0.67
Residual Indentation	EN 433   ≤ 0.10mm
Color Fastness	ISO 105-B02   ≥ 6
Dimensional Stability	EN 434   ≤ 0.10mm
Flexibility	EN 435   No crack was found
Electrical Behavior	EN 1081 Pass

**IMPACT**  
LUXURY VINYL TILE

